


✕ *pad printing machines*

✕ *pad printing accessories*



**pad-printing machine
microPrint Modul 220E
closed system
1 colour**

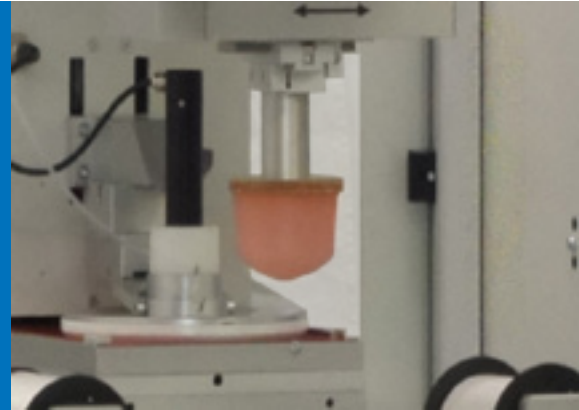

pic: shows optional security housing

- ✕ freely programmable printing positions on x-y-position
- ✕ electrical driven pad stroke
- ✕ individually programmable printing sequences and flows
- ✕ set-up time minimization
- ✕ all parameters are storable and retrievable



pad-printing machine microPrint Modul 220E closed system 1 colour



Technical data

The Modul 220E is a precise, compact and robust built pad printing machine for highest demands. The Modul 220E is to be used manually as stand machine, or easily can be integrated in fully automatic systems.

| | |
|------------------------|--|
| clichee size: | max. 220 x 420 mm |
| ink-cup: | 1 x Ø 120 mm, 1 x Ø 140 mm, 1 x Ø 160 mm, 1 x Ø 180 mm, 1 x Ø 200 mm |
| max. print image size: | 1 x Ø 110 mm, 1 x Ø 130 mm, 1 x Ø 150 mm, 1 x Ø 170 mm, 1 x Ø 180 mm |
| cycles: | up to 1.600 to 2.000 cycles / hour without / with pad cleaning |
| drive: | pneumatic + linear, electrical driven pad stroke |
| force of pressure: | max. 3500 N |
| air consumption: | 130 liter/min |
| pneumatic-supply: | 5-6 bar |
| controlling: | SPS |
| sizes: | 1.432 x 1.145 x 528 mm (D x H x W) |
| weight: | 510 kg base including |



Optional pad shuttle for pad movement



Different print images on cliché



Viscomat: (optionally)

Scope of delivery: pad cleaning, ink-cup, cliché holder, foot switch

Tampomark GmbH
Rheinhorststr. 1-3
D-67071 Ludwigshafen

Fon: +49 (621) 150328-0
Fax: +49 (621) 150328-99

info@tampomark.de
www.tampomark.de



Click here for
the homepage.
Just scan with
your phone.

